


ROPE 35Wx7 COMPAK

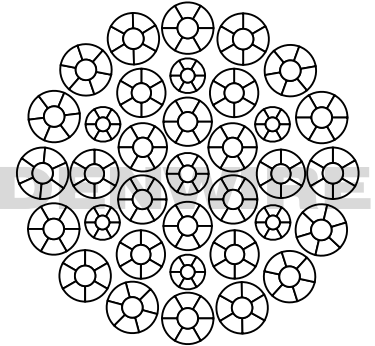

Minimum Breaking Force Factor
K ≈ 0,445

Nominal Length Mass Factor
W ≈ 0,510

Diameter	kg/100M	1770		1960		2160	
		kN	Kg	kN	Kg	kN	Kg
8	32,64	50,40	5.139	55,80	5.690	61,50	6.271
9	41,31	63,80	6.504	70,60	7.202	77,90	7.937
10	51,00	78,80	8.029	87,20	8.891	96,10	9.798
11	61,71	95,30	9.715	105,50	10.758	116,30	11.856
12	73,44	113,40	11.562	125,60	12.803	138,40	14.109
13	86,19	133,10	13.569	147,40	15.026	162,40	16.559
14	99,96	154,40	15.737	171,00	17.426	188,40	19.204
16	130,56	201,60	20.554	223,30	22.761	246,10	25.083
18	165,24	255,00	26.014	283,00	28.807	311,00	31.746
19	184,11	284,00	28.985	315,00	32.096	347,00	35.371
20	204,00	315,00	32.116	349,00	35.564	384,00	39.193
22	246,84	381,00	38.861	422,00	43.032	465,00	47.423
24	293,76	454,00	46.247	502,00	51.212	554,00	56.437
26	344,76	532,00	54.276	590,00	60.103	650,00	66.236
28	399,84	618,00	62.948	684,00	69.705	754,00	76.818
30	459,00	709,00	72.261	785,00	80.018	865,00	88.183
32	522,24	807,00	82.217	893,00	91.043	984,00	100.333
34	589,56	911,00	92.816	1.008,00	102.779	1.111,00	113.267
36	660,96	1.021,00	104.057	1.130,00	115.226	1.246,00	126.984
38	736,44	1.137,00	115.940	1.259,00	128.385	1.388,00	141.486
40	816,00	1.260,00	128.465	1.396,00	142.255	1.538,00	156.771