


ROPE
6x12+7FC

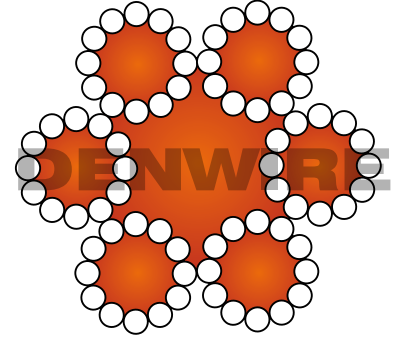

Minimum Breaking Force Factor **K = 0,209**
Nominal Length Mass Factor **W = 0,251**

Diameter	kg/100M	1770		1960	
		kN	Kg	kN	Kg
3,0	2,26	3,33	339	3,69	376
4,0	4,02	5,92	603	6,55	668
5,0	6,28	9,25	943	10,24	1.044
6,0	9,04	13,3	1.358	14,70	1.503
8,0	16,06	23,70	2.413	26,20	2.672
9,0	20,33	30,00	3.054	33,20	3.382
10,0	25,10	37,00	3.771	41,00	4.176
11,0	30,37	44,80	4.563	49,60	5.053
12,0	36,14	53,30	5.430	59,00	6.013
13,0	42,42	62,50	6.373	69,20	7.057
14,0	49,20	72,50	7.391	80,30	8.184
16,0	64,26	94,70	9.654	104,90	10.690