


ROPE 6x24+7FC

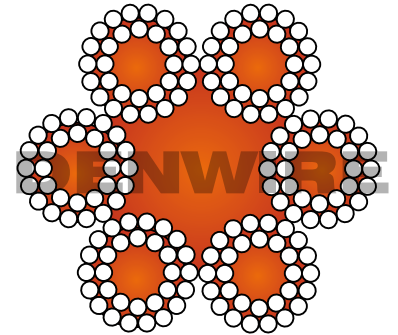

Minimum Breaking Force Factor
K = 0,280

Nominal Length Mass Factor
W = 0,318

| Diameter | kg/100M | 1770 | | 1960 | |
|----------|---------|--------|--------|--------|--------|
| | | kN | Kg | kN | Kg |
| 6,0 | 11,45 | 17,80 | 1.819 | 19,80 | 2.014 |
| 8,0 | 20,35 | 31,70 | 3.233 | 35,10 | 3.580 |
| 9,0 | 25,76 | 40,10 | 4.092 | 44,50 | 4.531 |
| 10,0 | 31,80 | 49,60 | 5.052 | 54,90 | 5.594 |
| 12,0 | 45,79 | 71,40 | 7.275 | 79,00 | 8.056 |
| 13,0 | 53,74 | 83,80 | 8.538 | 92,70 | 9.454 |
| 14,0 | 62,33 | 97,10 | 9.902 | 107,60 | 10.965 |
| 16,0 | 81,41 | 126,90 | 12.933 | 140,50 | 14.321 |
| 18,0 | 103,03 | 161,00 | 16.368 | 178,00 | 18.126 |
| 20,0 | 127,20 | 198,00 | 20.208 | 220,00 | 22.377 |
| 22,0 | 153,91 | 240,00 | 24.452 | 266,00 | 27.076 |
| 24,0 | 183,17 | 285,00 | 29.099 | 316,00 | 32.223 |
| 26,0 | 214,97 | 335,00 | 34.151 | 371,00 | 37.817 |
| 28,0 | 249,31 | 389,00 | 39.608 | 430,00 | 43.859 |
| 30,0 | 286,20 | 446,00 | 45.468 | 494,00 | 50.349 |
| 32,0 | 325,63 | 507,00 | 51.732 | 562,00 | 57.286 |