


ROPE
7x19 Covered

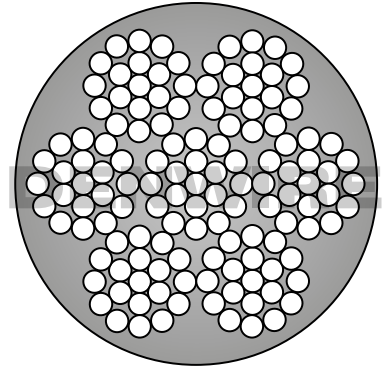

Minimum Breaking Force Factor

K = 0,362

Nominal Length Mass Factor

W = 0,381

Diameter	kg/100M	1770		1960		1570 (AISI)	
		kN	Kg	kN	Kg	kN	Kg
2,0	1,52	2,56	261	2,84	289	2,27	232
2,5	2,38	4,00	408	4,43	452	3,55	362
3,0	3,43	5,77	588	6,39	651	5,12	521
4,0	6,10	10,25	1.045	11,35	1.157	9,09	927
5,0	9,53	16,02	1.633	17,74	1.808	14,21	1.448
6,0	13,72	23,10	2.351	25,50	2.604	20,50	2.086
6,5	16,10	27,10	2.760	30,00	3.056	24,00	2.448
7,0	18,67	31,40	3.200	34,80	3.544	27,80	2.839
8,0	24,38	41,00	4.180	45,40	4.629	36,40	3.708
9,0	30,86	51,90	5.291	57,50	5.858	46,00	4.693
10,0	38,10	64,10	6.531	71,00	7.233	56,80	5.793
11,0	46,10	77,50	7.903	85,90	8.751	68,80	7.010
12,0	54,86	92,30	9.405	102,20	10.415	81,80	8.343
13,0	64,39	108,30	11.038	119,90	12.223	96,00	9.791
14,0	74,68	125,60	12.802	139,10	14.176	111,40	11.355
16,0	97,54	164,00	16.721	181,60	18.516	145,50	14.831