


ROPE
8x7+FC

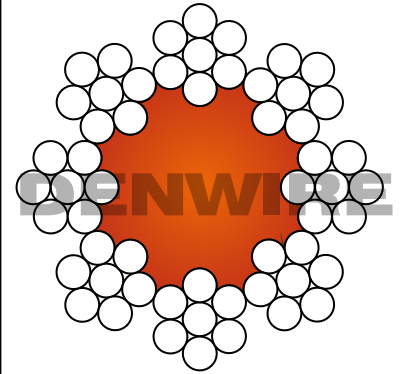

Minimum Breaking Force Factor
K = 0,291

Nominal Length Mass Factor
W = 0,327

Diameter	kg/100M	1770		1960		1570 (AISI)	
		kN	Kg	kN	Kg	kN	Kg
4,0	5,23	8,24	840	9,13	930	7,31	745
4,5	6,62	10,43	1.063	11,55	1.177	9,25	943
5,0	8,18	12,88	1.313	14,26	1.454	11,42	1.164
6,0	11,77	18,54	1.890	20,53	2.093	16,45	1.677
6,5	13,82	21,76	2.218	24,10	2.456	19,30	1.968
7,0	16,02	25,24	2.573	27,95	2.849	22,39	2.282
8,0	20,93	32,96	3.360	36,50	3.721	29,24	2.981
9,0	26,49	41,72	4.253	46,20	4.709	37,01	3.772
10,0	32,70	51,51	5.250	57,04	5.814	45,69	4.657
11,0	39,57	62,32	6.353	69,01	7.035	55,28	5.635
12,0	47,09	74,17	7.561	82,13	8.372	65,79	6.706
13,0	55,26	87,05	8.873	96,39	9.826	77,21	7.871
14,0	64,09	100,95	10.291	111,79	11.396	89,55	9.128
16,0	83,71	131,86	13.441	146,01	14.884	116,96	11.922
18,0	105,95	166,88	17.011	184,80	18.838	148,03	15.089
19,0	118,05	185,94	18.954	205,90	20.989	164,93	16.812
20,0	130,80	206,03	21.002	228,14	23.256	182,75	18.629