


## ROPE 6x36+IWRC COMPAK

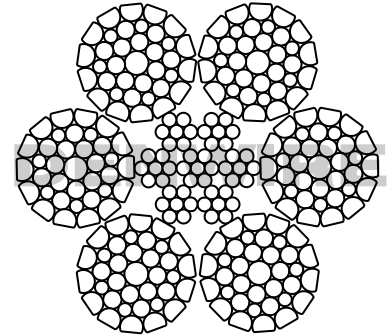

Minimum Breaking Force Factor

**K ≈ 0,405**

Nominal Length Mass Factor

**W ≈ 0,478**

Diameter	kg/100M	1770		1960		2160	
		kN	Kg	kN	Kg	kN	Kg
8	30,59	45,90	4.677	50,80	5.179	56,00	5.707
9	38,72	58,10	5.919	64,30	6.554	70,90	7.223
10	47,80	71,70	7.307	79,40	8.092	87,50	8.917
11	57,84	86,70	8.842	96,00	9.791	105,90	10.790
12	68,83	103,20	10.523	114,30	11.652	126,00	12.841
13	80,78	121,10	12.349	134,20	13.675	147,80	15.070
14	93,69	140,50	14.322	155,60	15.860	171,50	17.478
16	122,37	183,50	18.707	203,20	20.715	223,90	22.829
18	154,87	232,00	23.676	257,00	26.217	283,00	28.892
19	172,56	259,00	26.379	287,00	29.211	316,00	32.192
20	191,20	287,00	29.229	318,00	32.367	350,00	35.670
22	231,35	347,00	35.368	384,00	39.164	423,00	43.160
24	275,33	413,00	42.090	457,00	46.608	504,00	51.364
26	323,13	485,00	49.398	537,00	54.700	591,00	60.282
28	374,75	562,00	57.290	622,00	63.439	686,00	69.913
30	430,20	645,00	65.766	714,00	72.826	787,00	80.257
32	489,47	734,00	74.827	813,00	82.859	896,00	91.314
34	552,57	829,00	84.473	918,00	93.541	1.011,00	103.086
36	619,49	929,00	94.703	1.029,00	104.869	1.134,00	115.570
38	690,23	1.035,00	105.518	1.146,00	116.845	1.263,00	128.768
40	764,80	1.147,00	116.917	1.270,00	129.468	1.400,00	142.679
42	843,19	1.265,00	128.901	1.400,00	142.738	1.543,00	157.303
44	925,41	1.388,00	141.470	1.537,00	156.656	1.694,00	172.641
46	1.011,45	1.517,00	154.623	1.680,00	171.221	1.851,00	188.693
48	1.101,31	1.652,00	168.361	1.829,00	186.434	2.016,00	205.458
50	1.195,00	1.792,00	182.683	1.985,00	202.294	2.187,00	222.936
52	1.292,51	1.938,00	197.590	2.146,00	218.801	2.365,00	241.127