


7x19



Art. No.:	Diameter	Weight	1770		1960		1570 (AISI)	
			mm	kg/100m	kN	Kg	kN	Kg
1121020	2,0	1,52	2,56	261	2,84	289	2,27	232
1121025	2,5	2,38	4,00	408	4,43	452	3,55	362
1121030	3,0	3,43	5,77	588	6,39	651	5,12	521
1121040	4,0	6,10	10,25	1.045	11,35	1.157	9,09	927
1121050	5,0	9,53	16,02	1.633	17,74	1.808	14,21	1.448
1121060	6,0	13,72	23,10	2.351	25,50	2.604	20,50	2.086
1121065	6,5	16,10	27,10	2.760	30,00	3.056	24,00	2.448
1121070	7,0	18,67	31,40	3.200	34,80	3.544	27,80	2.839
1121080	8,0	24,38	41,00	4.180	45,40	4.629	36,40	3.708
1121090	9,0	30,86	51,90	5.291	57,50	5.858	46,00	4.693
1121100	10,0	38,10	64,10	6.531	71,00	7.233	56,80	5.793
1121110	11,0	46,10	77,50	7.903	85,90	8.751	68,80	7.010
1121120	12,0	54,86	92,30	9.405	102,20	10.415	81,80	8.343
1121130	13,0	64,39	108,30	11.038	119,90	12.223	96,00	9.791
1121140	14,0	74,68	125,60	12.802	139,10	14.176	111,40	11.355
1121160	16,0	97,54	164,00	16.721	181,60	18.516	145,50	14.831

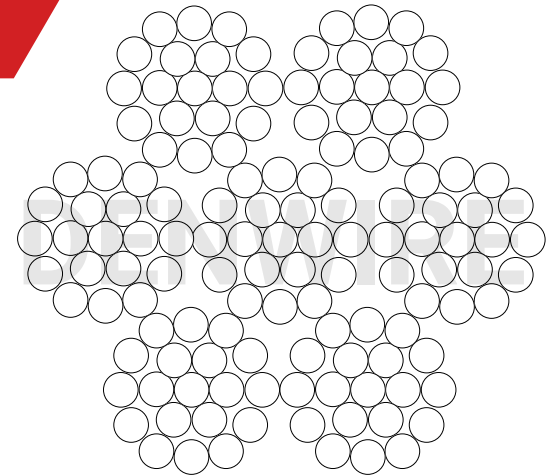

Guidance on Dimensions:

Please note that the dimensions provided in this catalog are approximate. For precise measurements or tailored solutions, feel free to reach out to our customer service. Thank you for considering Denwire Ropes.